

Fourneau
«Chambertin - Chassagne»
«Fontenay»

SPECIFICATIONS

WARNING: If the information in this manual is not followed exactly, a fire or explosion may result causing property damage, personal injury or death.

- Do not store or use gasoline or other flammable vapors and liquids in the vicinity of this or any other appliance.
- **WHAT TO DO IF YOU SMELL GAS.**
 - Do not try to light any appliance.
 - Do not touch any electrical switch.
 - Do not use any phone in your building.
 - Immediately call your gas supplier from a neighbor's phone. Follow the gas supplier's instructions.
 - If you cannot reach your gas supplier, call the fire department.
- Installation and service must be performed by a qualified installer, service agency or the gas supplier.




WARNING:
THIS RANGE CAN TIP
INJURY TO PERSONS COULD RESULT
INSTALL ANTI-TIP DEVICE PACKED
WITH RANGE
SEE INSTALLATION INSTRUCTIONS







SPECIFICATIONS

CHAMBERTIN - CHASSAGNE - FONTENAY

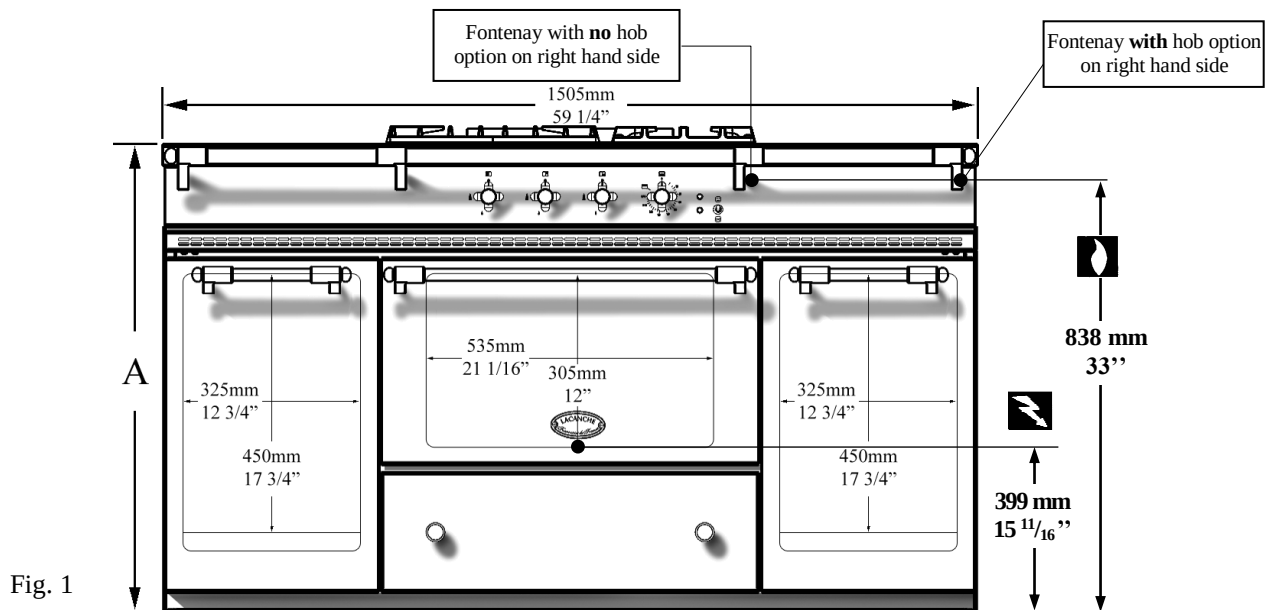




The range Height is adjustable:
Refer to the
RANGE HEIGHT
TABLE

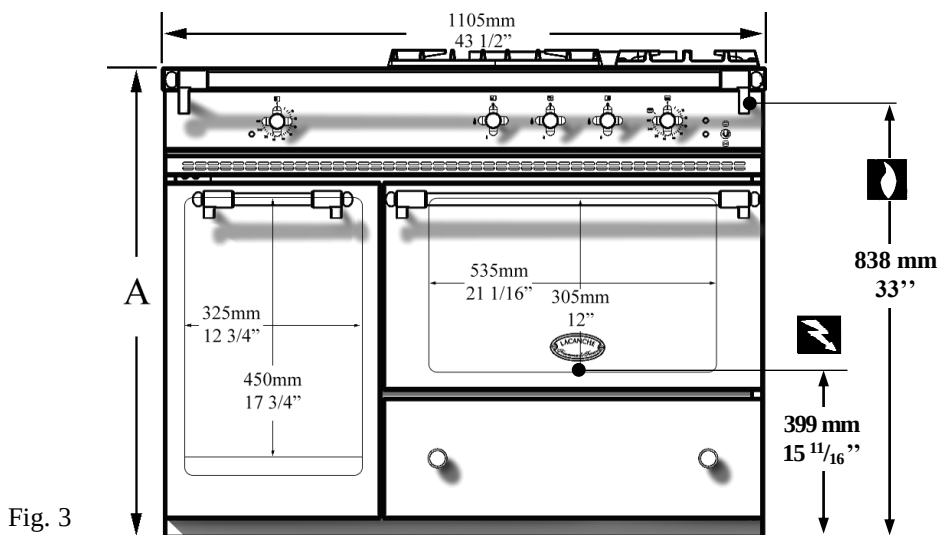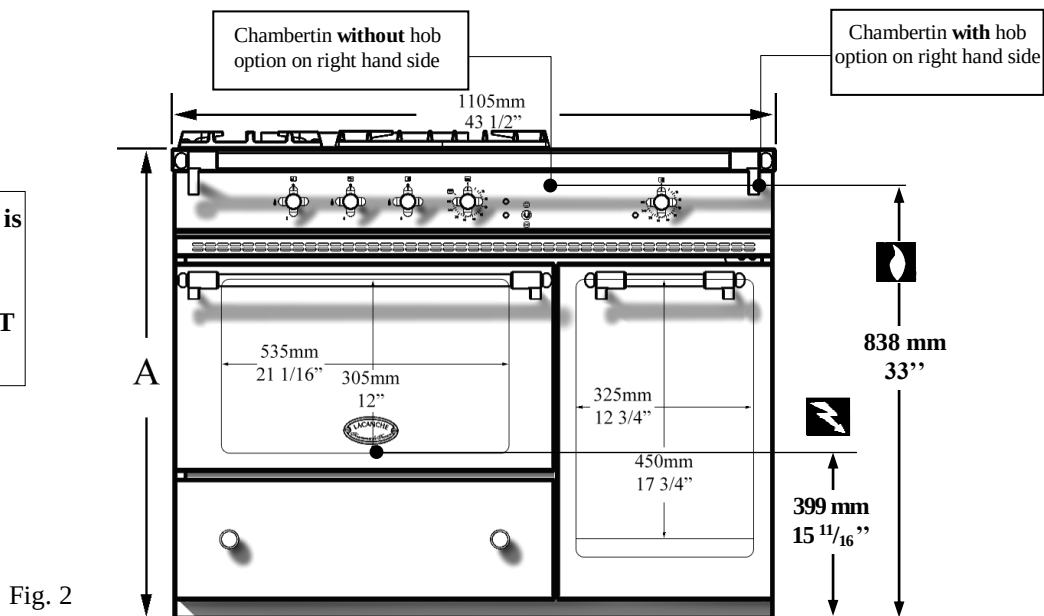



SPECIFICATIONS

CHAMBERTIN - CHASSAGNE - FONTENAY

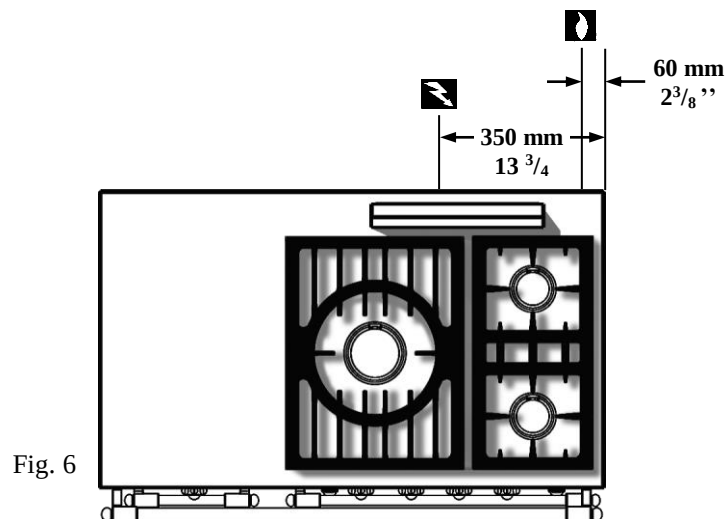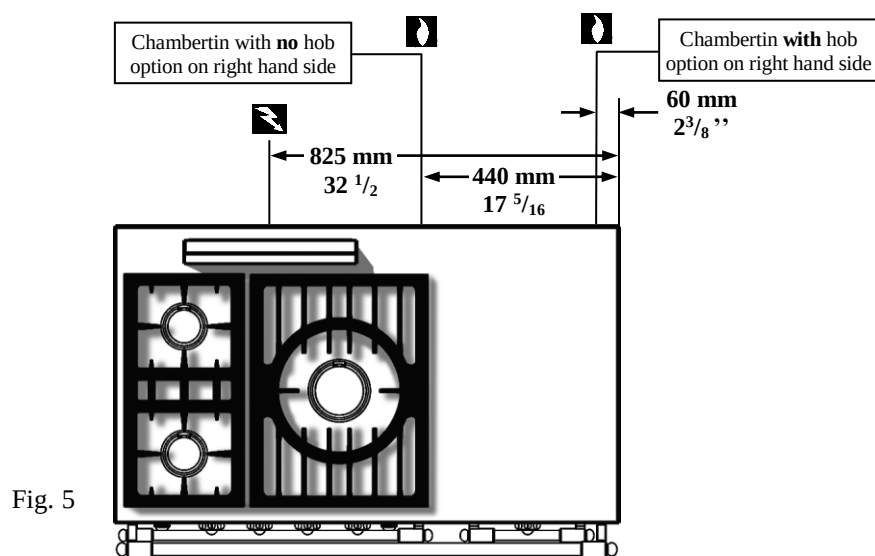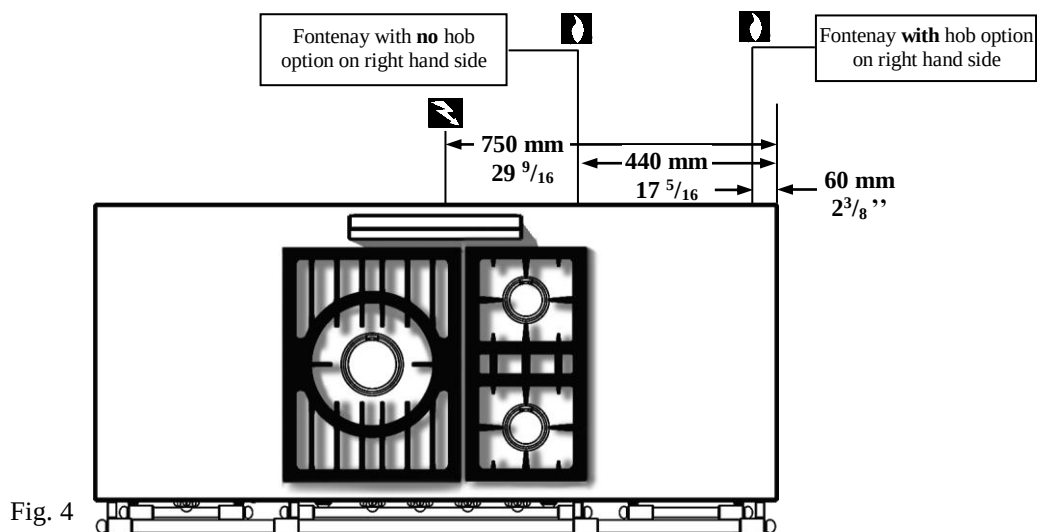



SPECIFICATIONS

CHAMBERTIN - CHASSAGNE - FONTENAY

The range Height is adjustable: Refer to the RANGE HEIGHT TABLE


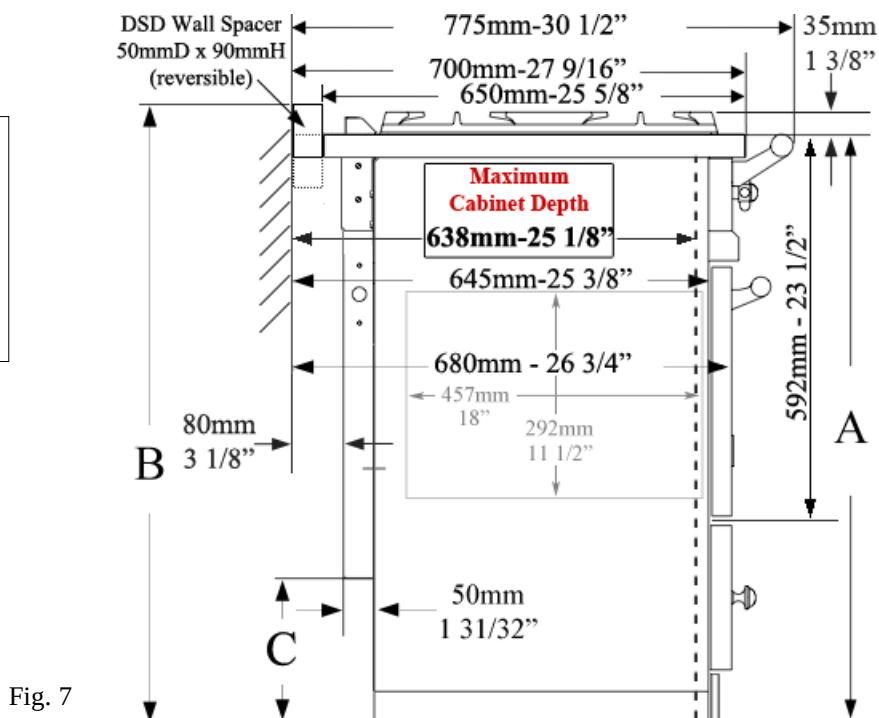


Fig. 7

RANGE HEIGHT TABLE			
The default range height of 35 3/8" will adjust to the standard countertop height of 36" using the included extended leveling feet provided (to a maximum height of 36 1/2")			
Range Height:	A	B	C
Default	900mm – 35 3/8" (Max 36 1/2")	950mm – 37 3/8"	215mm – 8 7/16"
Optional	930mm – 36 5/8" (Max 37 3/4")	980mm – 38 9/16"	245mm – 9 5/8"
All final range height dimensions are variable with the use of the adjustable range feet. Maximum added height for the <u>Roller Feet</u> : 16mm - 5/8", Extended Leveling Feet : 30mm – 1 3/16"			

DSD 50mm Wall Spacer (reversible):






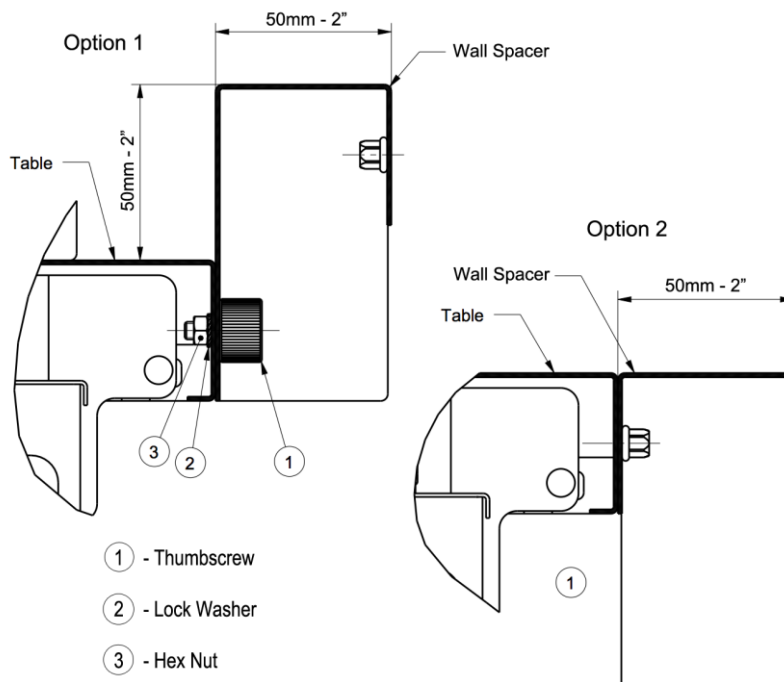

SPECIFICATIONS

CHAMBERTIN - CHASSAGNE - FONTENAY

Potfiller Positions:

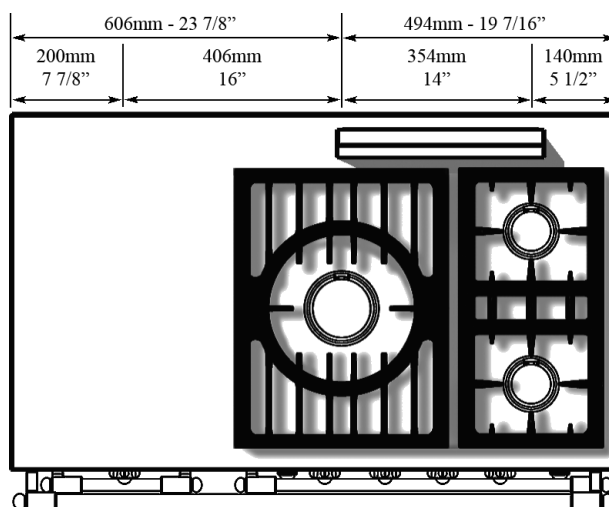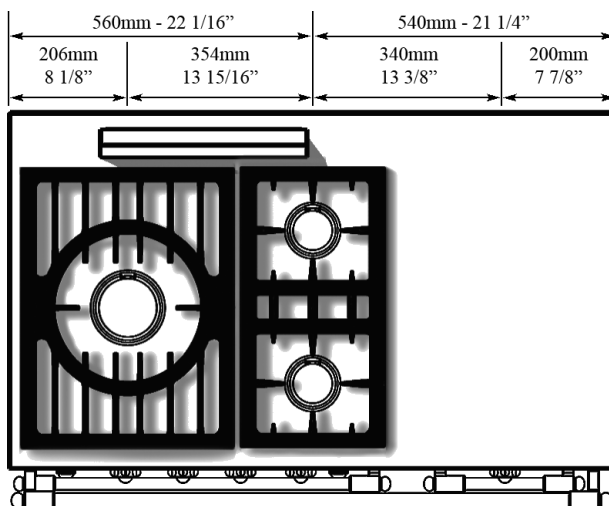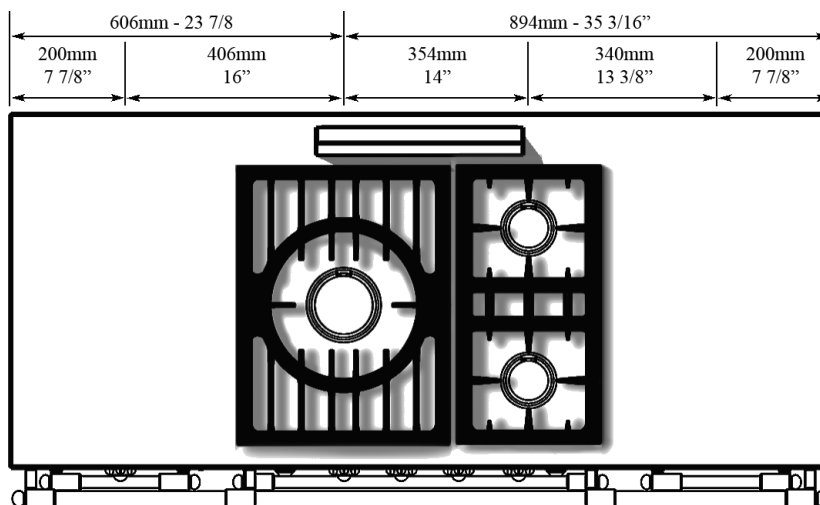



SPECIFICATIONS

CHAMBERTIN - CHASSAGNE - FONTENAY

Layout:

Cook's stove consisting of a cooking surface above a 69 litre oven and one or two general purpose cabinets (depending on model) which can optionally be equipped with **FONTENAY** (Figures 1, 4 & 7), **CHAMBERTIN** (Figures 2, 5 & 7) or **CHASSAGNE** (Figures 3, 6 & 7) warming cupboards. The work surfaces adjacent to the cooking surfaces are designed to accommodate one of the cooktop options in the **LACANCHE** range or to be used as a worktop.

Description:

Enamelled steel or stainless body panels AISI 430. Pressing cooking surface (stainless steel AISI 304) (Figure 5, 7 and 8). 3- or 4- burners of different size and power individually controlled by a safety valve. Electrical ignition. TRADITION" model equipped with a 385 x 510 mm (15 ⁵/₃₂" x 20 ⁵/₆₄") heating plate (Figures 7 and 9).

Gas oven:

Enamelled sheet metal. Dimensions W x D x H: 535 mm (21 ¹/₁₆") x 465 mm (18 ¹⁹/₆₄") x 300 mm (11 ⁵¹/₆₄"). 3 shelf level with 70 mm spacing, 69 liters / 2.44 ft³. Heating provided by thermostatically controlled burner, thermocouple safety cut-outs. Electrical ignition.

Power supply: 120 VAC 60Hz.

Multifunction electric oven:

Dimensions W x D x H: 535 (21 ¹/₁₆") x 420 (16 ¹⁷/₃₂") x 265 (10 ²⁷/₆₄"); 68 litres/ 2.40 ft³, 3 shelf level with 70 mm spacing

Electric grill with a rating of 2850 W

Function static electric oven:

One 1700 W element at the base and a peripheral 1200 W element in the roof which operate simultaneously. Thermostatically controlled roof and base heating elements, safety cut-out by safety thermostat.

Rating: 2900 W – Power supply: 240 Volts 60Hz.

Function ventilated electric oven:

Heating provided by one circular 2650 W element and one peripheral of 1200 W element. Thermostatically controlled heating elements, safety cut-out by safety thermostat.

Rating: 2650 W – Power supply: 240 Volts 60Hz.

Warming cabinet (option)

Plate warmer-insulated stainless internal lining (AISI 304). Heating provided by 950 W heating element underneath base. Controlled by thermostat selector switch, 86 to 230 °F. Capacity: 72 plates, Ø 240 mm (9.5"). Dimensions D x W x H: 530 mm (20.8") x 325 mm (12.8") x 490 mm (19.3"). 5 shelf level with 68 mm (2.8").

Rating: 1030 W – Power supply: 240 Volts 60Hz

Accessories

Per oven: one roasting pan, one shelf

General-purpose cabinet: 1 shelf.

Warming cabinet: 2 shelves.

Shipment-Packaging

Unpack and check the appliance is in good condition. In case of damage, note any reservations on the delivery note and report them within 7 days to your retailer/distributor to be claimed on shippers insurance.

Appliance	Width	Depth	Height mm	Weight Gross/Net
LG 1131 G	1250 mm / 49,2"	840 mm / 33.1"	1070 mm / 42.1"	140 kg / 160 kg - 310 / 355 lb
LG 1531 G	1650 mm / 64,1"	840 mm / 33.1"	1070 mm / 42.1"	200 kg /180 kg – 445 / 400 lb



SPECIFICATIONS

CHAMBERTIN - CHASSAGNE - FONTENAY

Gas connection:

1/2" ID NPT (Sch 40) inlet, on male coupling (Figures 1, 3, 4, 5, 6 & 7). Sealant on all pipe joints must be resistive to LP gas. If used, a flex gas line for the gas supply must be metal of at least 1/2" ID NPT approved by an approved certifying agency (A.G.A., C.G.A., etc.) in compliance with ANSI Z21.41 and Z21.69. Never use a hose made of rubber or other synthetic material.

Electrical connection:

On terminal block at the rear of the appliance. Use flexible cord in accordance with standard N.E.C., AINSI/NEMA 70-1996 or latest edition (not cord provided by factory) (Figures 1, 2, 3, 4, 5, 6 & 7). Appliance power cord is installed by the importer/distributor. Do not remove installed power cord.

Power Specifications for Fontenay (no Warming Cupboard) Ranges

FONTENAY	Voltage (V)	Amperage (A)	Wattage (W)
ULG1531G	120 / 240	< 0.5	< 100
ULG1531E	120 / 240	12.1	2902
ULG1531CT	120 / 240	11.1	2652
ULCF1531G	120 / 240	< 0.5	< 100
ULCF1531E	120 / 240	14.1	3375
ULCF1531CT	120 / 240	15.8	3798

Ranges with Plancha cooktop option, add: 9.2 Amps, 2200 Watts
 Ranges with Multicooker option, add: 14.6 Amps, 3500 Watts
 Ranges with Induction cooktop option, add: 16.2 Amps, 3700 Watts

Power Specifications for Fontenay (+ETL001*) Ranges

FONTENAY + ETL001*	Voltage (V)	Amperage (A)	Wattage (W)
ULG1531G+ETL001	120 / 240	4.3	1034
ULG1531CT+ETL001	120 / 240	16.4	3850
ULCF1531G+ETL001	120 / 240	4.3	1034
ULCF1531CT+ETL001	120 / 240	16.4	3850

* ETL001 = one warming cupboard



Ranges with Plancha cooktop option, add: 9.2 Amps, 2200 Watts
 Ranges with Multicooker option, add: 14.6 Amps, 3500 Watts
 Ranges with Induction cooktop option, add: 16.2 Amps, 3700 Watts

Power Specifications for Fontenay (+2ETL001*) Ranges

FONTENAY + 2ETL001*	Voltage (V)	Amperage (A)	Wattage (W)
ULG1531G+2ETL001	120 / 240	8.6	2068
ULG1531CT+2ETL001	120 / 240	20.2	4850
ULCF1531G+2ETL001	120 / 240	8.6	2068
ULCF1531CT +2ETL001	120 / 240	20.2	4850

* 2ETL001 = two warming cupboards

Ranges with Plancha cooktop option, add: 9.2 Amps, 2200 Watts
 Ranges with Multicooker option, add: 14.6 Amps, 3500 Watts
 Ranges with Induction cooktop option, add: 16.2 Amps, 3700 Watts

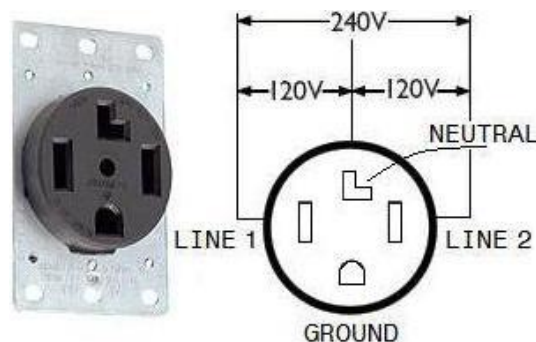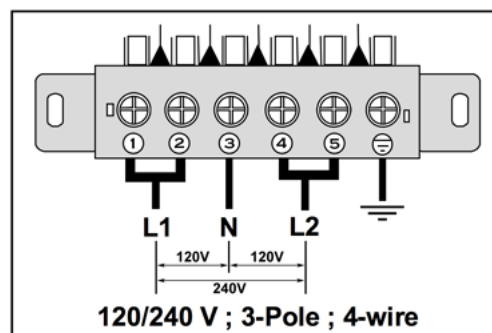



SPECIFICATIONS

CHAMBERTIN - CHASSAGNE - FONTENAY

Power Specifications for Chambertin and Chassagne (no Warming Cupboard) Ranges

CHAMBERTIN CHASSAGNE	Voltage (V)	Amperage (A)	Wattage (W)
ULG1131G	120 / 240	< 0.5	< 100
ULG1141G	120 / 240	< 0.5	< 100
ULG1131E	120 / 240	12.1	2902
ULG1141E	120 / 240	12.1	2902
ULG1131CT	120 / 240	11.1	2652
ULG1141CT	120 / 240	11.1	2652
ULCF1131G	120 / 240	< 0.5	< 100
ULCF1131E	120 / 240	12.1	2902
ULCF1131CT	120 / 240	11.1	2652

Ranges with Plancha cooktop option, add: 9.2 Amps, 2200 Watts
 Ranges with Induction cooktop option, add: 25.0 Amps, 6000 Watts

Power Specifications for Chambertin and Chassagne (+ETL001*) Ranges

CHAMBERTIN CHASSAGNE +ETL001*	Voltage (V)	Amperage (A)	Wattage (W)
ULG1131G+ETL001	120 / 240	4.1	972
ULG1141G+ETL001	120 / 240	4.1	972
ULG1131E+ETL001	120 / 240	16.1	3852
ULG1141E+ETL001	120 / 240	16.1	3852
ULG1131CT+ETL001	120 / 240	15.1	3602
ULG1141CT+ETL001	120 / 240	15.1	3602
ULCF1131G+ETL001	120 / 240	4.1	972
ULCF1131E+ETL001	120 / 240	16.1	3852
ULCF1131CT+ETL001	120 / 240	15.1	3602

* ETL001 = one warming cupboard
 Ranges with Plancha cooktop option, add: 9.2 Amps, 2200 Watts
 Ranges with Induction cooktop option, add: 25.0 Amps, 6000 Watts

Gas supplying:

Appliance gas supplying can be switched, please refer to rating plate and marking at the rear of the appliance.
 If specified at the time of the order, the appliance is built to use the gas type specified. No further work is necessary.

Pressures and hourly consumption:

Appliance gas supplying can be switched (table 1). Gas input pressure should be no more than **0.5psi**.

Table 1		
PRESSURE	6" WC	10" WC
GAS	Natural gas	G.P.L.
Burner	Btu / hr	Btu / hr
Oven	13500	11000
Ultra fast (UF) Tradition (T)	18000	17000
Intensive (I)	15000	13000
Fast (F)	11000	10000
Semi fast (SF)	5000	5000



SPECIFICATIONS

CHAMBERTIN - CHASSAGNE - FONTENAY

