

Fourneau

«Cluny»

SPECIFICATIONS




WARNING: If the information in this manual is not followed exactly, a fire or explosion may result causing property damage, personal injury or death.

- Do not store or use gasoline or other flammable vapors and liquids in the vicinity of this or any other appliance.
- **WHAT TO DO IF YOU SMELL GAS.**
 - Do not try to light any appliance.
 - Do not touch any electrical switch.
 - Do not use any phone in your building.
 - Immediately call your gas supplier from a neighbour's phone. Follow the gas supplier's instructions.
 - If you cannot reach your gas supplier, call the fire department.
- Installation and service must be performed by a qualified installer, service agency or the gas supplier.





WARNING:
THIS RANGE CAN TIP
INJURY TO PERSONS COULD RESULT
INSTALL ANTI-TIP DEVICE PACKED
WITH RANGE
SEE INSTALLATION INSTRUCTIONS



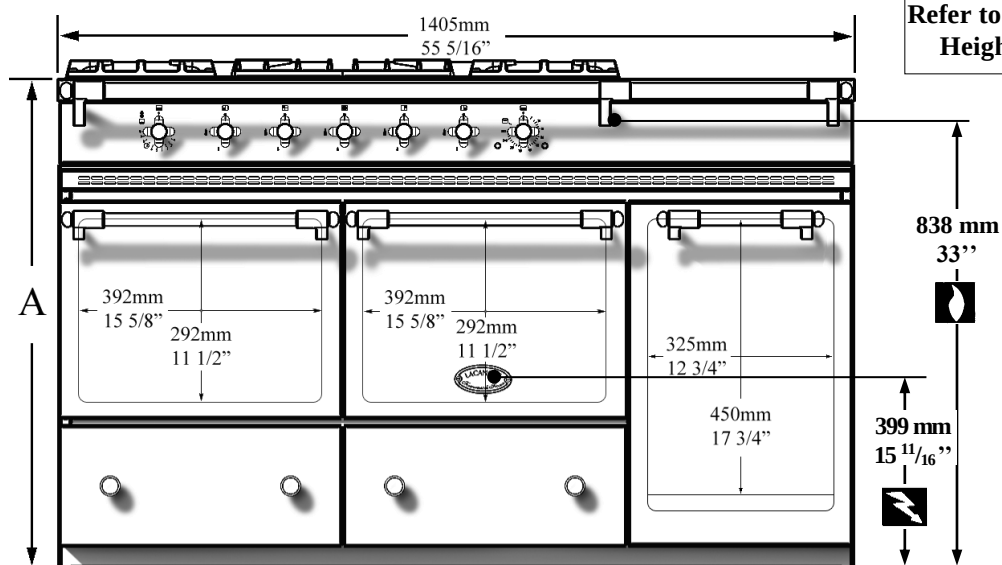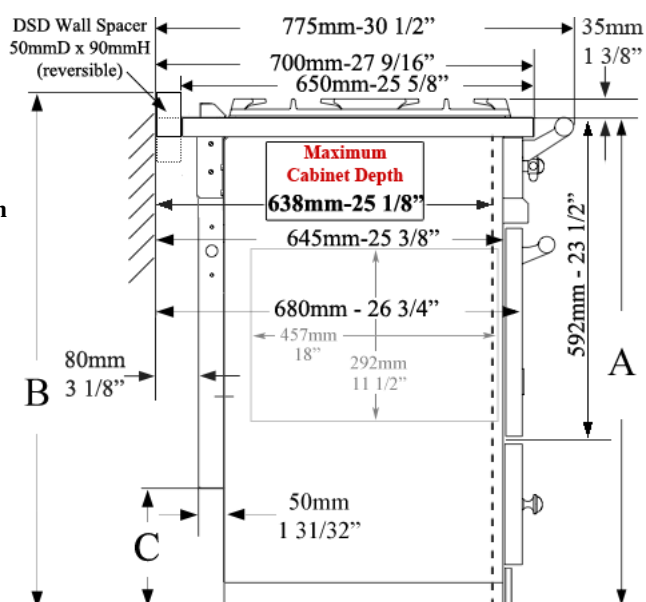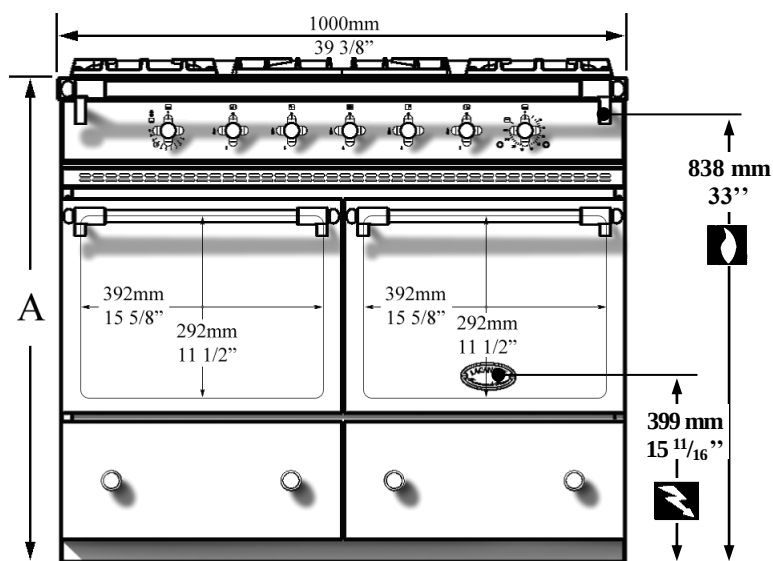

**The range Height
is adjustable:
Refer to the Range
Height Table**


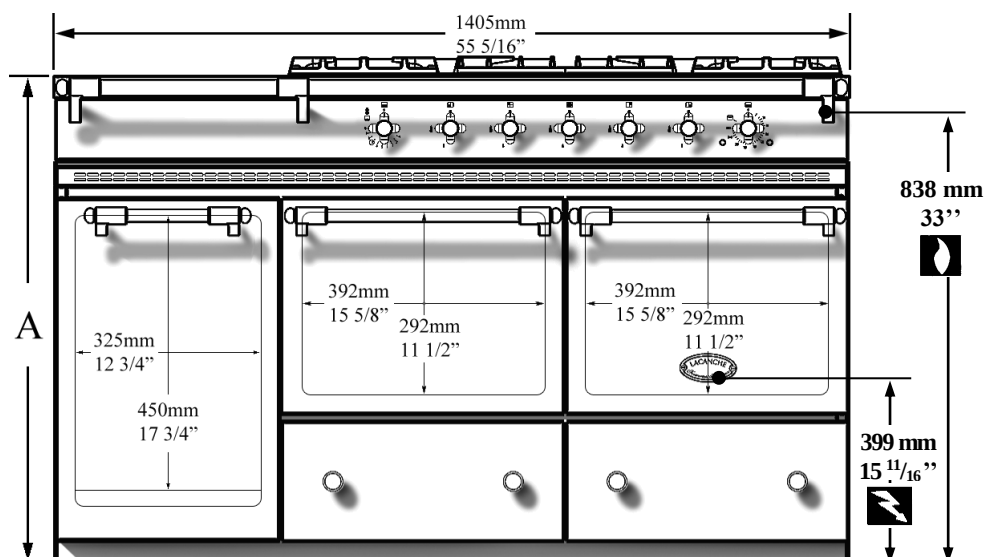


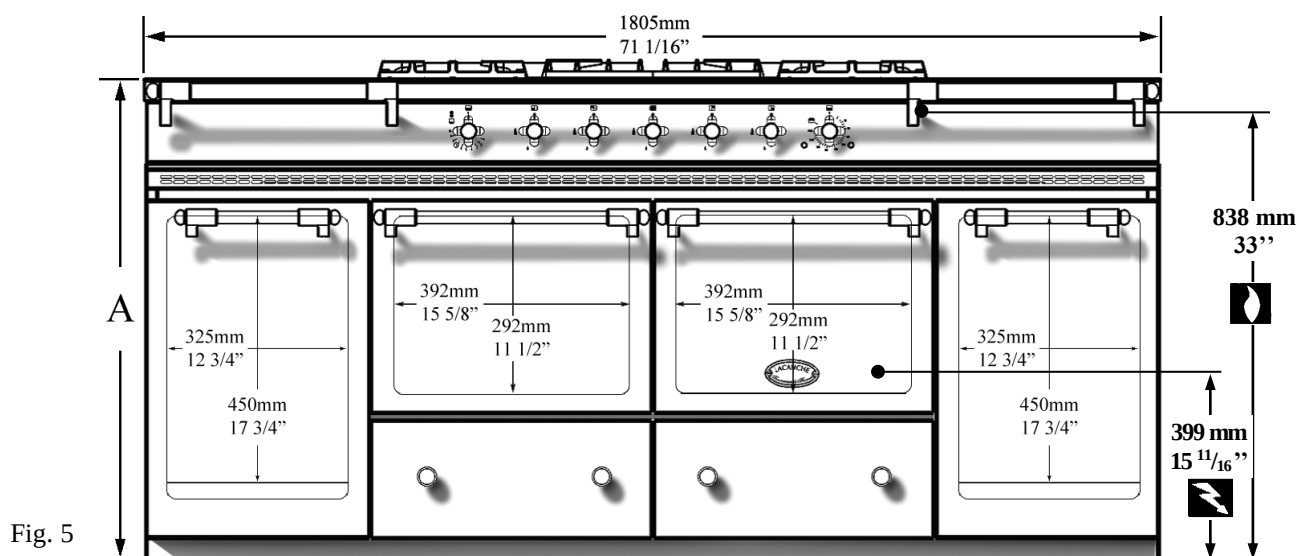

RANGE HEIGHT TABLE			
The default range height of 35 3/8" will adjust to the standard countertop height of 36" using the included extended leveling feet provided (to a maximum height of 36 1/2")			
Range Height:	A	B	C
Default	900mm – 35 3/8" (Max 36 1/2")	950mm – 37 3/8"	215mm – 8 7/16"
Optional	930mm – 36 5/8" (Max 37 3/4")	980mm – 38 9/16"	245mm – 9 5/8"

All final range height dimensions are variable with the use of the adjustable range feet.
Maximum added height for the Roller Feet: 16mm - 5/8", Extended Leveling Feet : 30mm – 1 3/16"





Potfiller Positions:

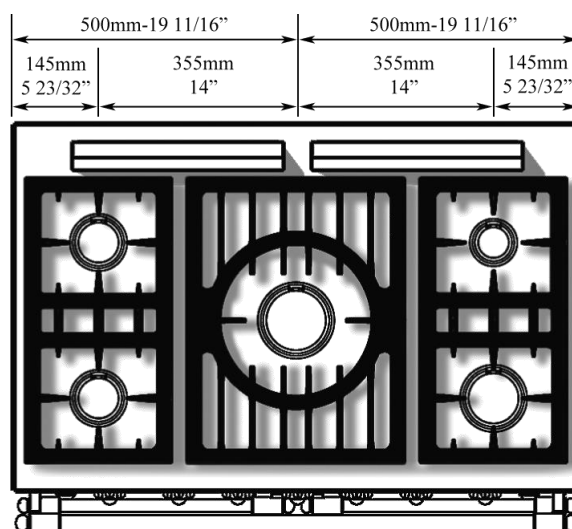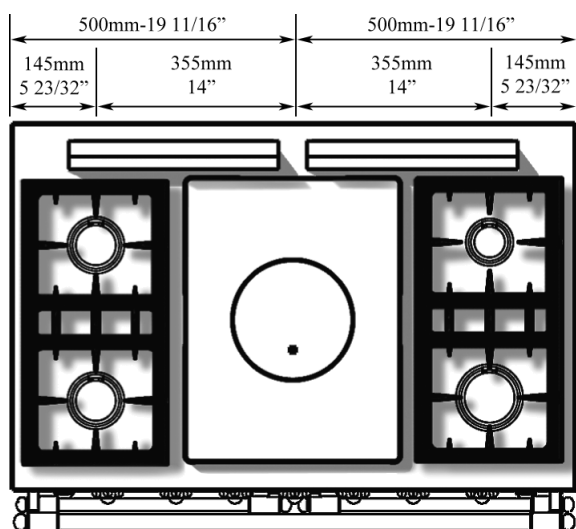



SPECIFICATIONS


CLUNY

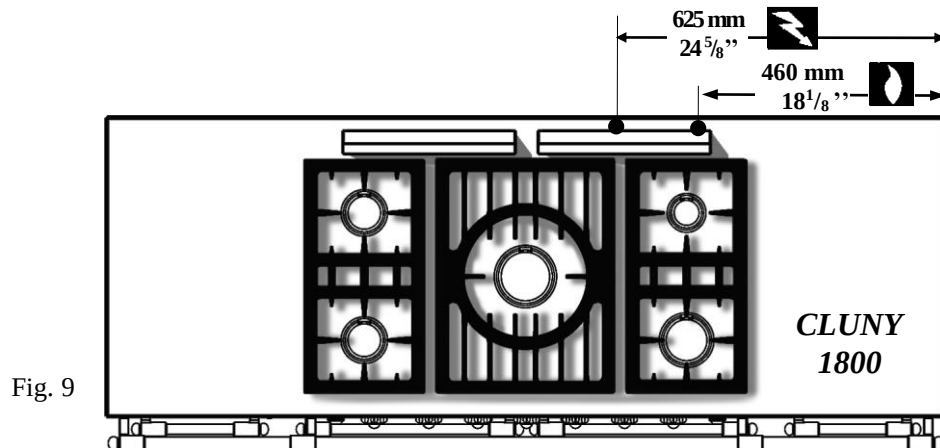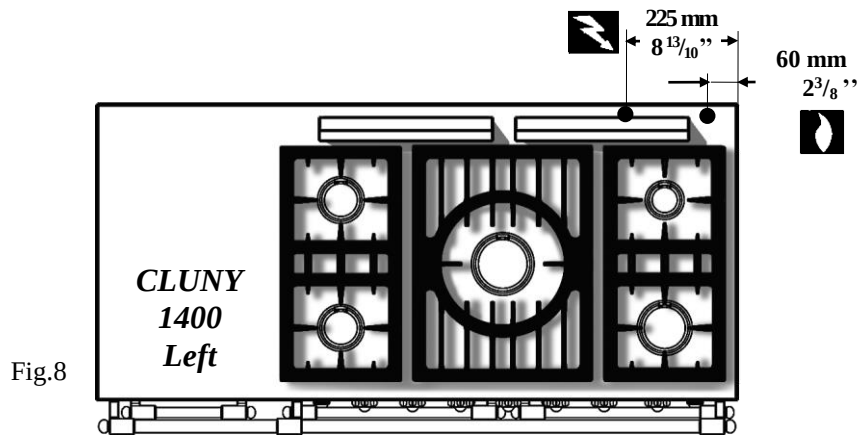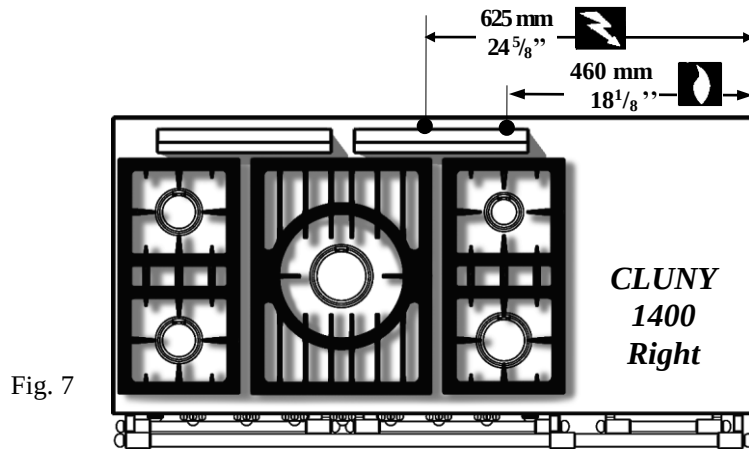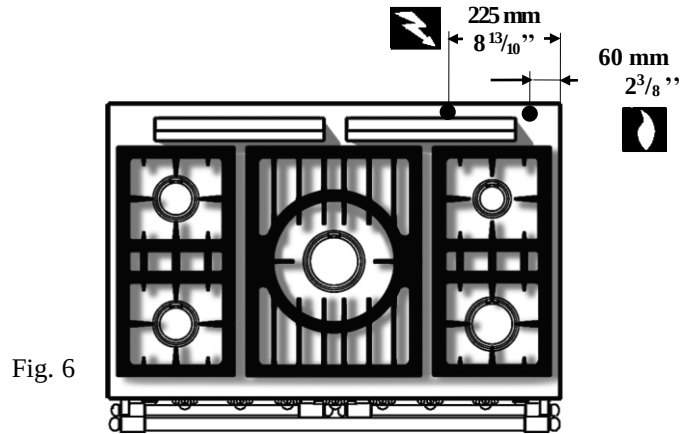



SPECIFICATIONS *CLUNY*

DSD 50mm Wall Spacer (reversible):

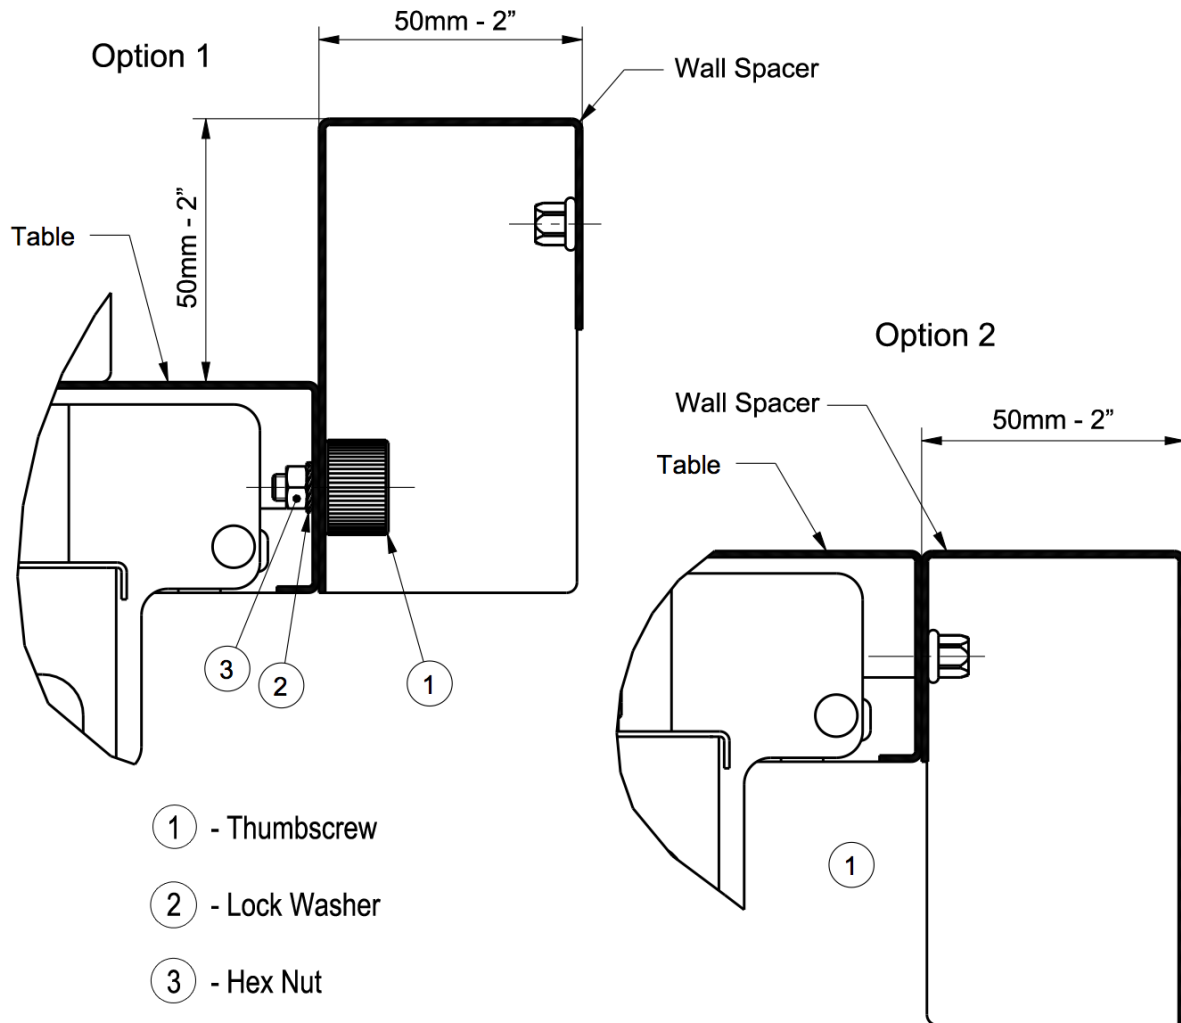



SPECIFICATIONS

CLUNY

Layout (standard):

5-burner cook's stove, 2 ovens (Figure 1). The work surfaces adjacent (CLUNY 1400 & 1800, figures 7, 8 & 9) to the cooking surfaces are designed to accommodate one of the optional built-in units in the LACANCHE range or to be used as a worktop.

Description:

Cooking surface and body panels:

Enamelled steel or stainless body panels AISI 430.

Press-formed cooking surfaces (stainless steel AISI 304) (Figures 6, 7, 8 & 9).

Standard Hob: 5 burners of different size and power (Table 1), individually controlled by a thermocouple safety valve. Electronic ignition. TRADITION" model equipped with a 385 x 510 mm (15 ⁵/₃₂" x 20 ⁵/₆₄") heating plate.

Power supply: 120 VAC 60Hz.

Gas oven:

Enamelled sheet metal. Dimensions: W x D x H: 392mm (15¹/₂") x 457mm (18") x 292mm (11¹/₂"). 3 shelf levels with 70 mm spacing, 52.3 liters / 1.85ft³. Heating provided by thermostatically controlled burner, thermocouple safety cut-outs. Electronic ignition.

Rating: 13500 BTU / Power supply: 120 VAC 60Hz.

Static electric oven (default):

Enamelled sheet metal. Dimensions: W x D x H: 392mm (15¹/₂") x 457mm (18") x 265mm (10⁷/₁₆"). 3 shelf levels with 70 mm spacing, 47.5 liters / 1.68ft³. Thermostatically controlled roof and base heating elements, safety cut-out by safety thermostat. Electric broiler/grill 2100 W.

Rating: 2200 W– Power supply: 240 VAC 60Hz.

Forced Convection electric oven (option):

Heating provided by circular heating element surrounding a circulation fan at oven rear.

Enamelled sheet metal. Dimensions: W x D x H: 392 mm (15¹/₂") x 410 mm (16¹/₈") x 265 mm (10⁷/₁₆"). 3 shelf level with 70 mm spacing, 42.6 liters / 1.50ft³. Thermostatically controlled heating elements, thermal safety cut-out by safety thermostat. Electric broiler/grill 2100 W.

Rating: 2650 W – Power supply: 240 VAC 60Hz.

Accessories (standard):

Gas Oven: A wire rack, a drip pan, a pastry sheet.

Electric Oven: A wire rack, a drip pan, a wire broil/grill insert, a pastry sheet.

Shipment / Packaging:

Unpack and check the appliance is in good condition. In case of damage, note any reservations on the delivery note and report them within 7 days to your retailer/distributor to be claimed on shippers insurance.

Appliance	Width	Depth	Height mm / "	Weight Gross/Net - Kg / lb
LG 1052 G	1130 mm / 44.5"	760 mm / 29.9"	1050 mm / 41.3"	120 kg /108 kg – 267 / 240 lb
LG 1452 G	1450 mm / 57.1"	840 mm / 33.1"	1070 mm / 42.1"	200 kg /180 kg – 445 / 400 lb
LG 1852 G	1850 mm / 72.8"	840 mm / 33.1"	1070 mm / 42.1"	275 kg /245 kg – 605 / 540 lb



SPECIFICATIONS CLUNY

Gas connection:

1/2" ID NPT (Sch 40) inlet, on male coupling (Figures 1, 3, 4, 5, 6, 7, 8, & 9). Sealant on all pipe joints must be resistive to LP gas.

If used, a flex gas line for the gas supply must be metal of at least 1/2" ID NPT approved by an approved certifying agency (A.G.A., C.G.A. etc.) in compliance with ANSI Z21.41 and Z21.69. Never use a hose made of rubber or other synthetic material.

Gas supply:


Appliance gas supplying can be switched, please refer to rating plate and marking at the rear of the appliance. **If specified at the time of the order, the appliance is built to use the gas type specified. No further work is necessary.**

Pressures and hourly consumption:

>> **Gas supply input pressure must be no higher than 0.5psi.**

Appliance gas supplying can be switched (Table 1).



Table 1		
PRESSURE	6" WC	10" WC
GAS	Natural Gas	L.P.
Burner	Btu / hr	Btu / hr
Oven	13500	11000
Ultra fast (UF) Tradition (T)	18000	17000
Intensive (I)	15000	13000
Fast (F)	11000	10000
Semi fast (SF)	5000	5000

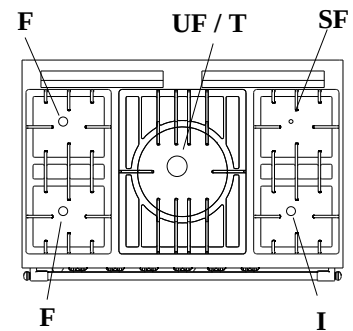

Electrical connection:

On terminal block at the rear of the appliance. Use flexible cord in accordance with standard N.E.C., ANSI/NEMA 70-1996 or latest edition (not cord provided by factory) (location on Figures 1, 3, 4, 5, 6, 7, 8 & 9).

>> **Appliance power cord is installed by importer/distributor. Do not remove installed power cord.**

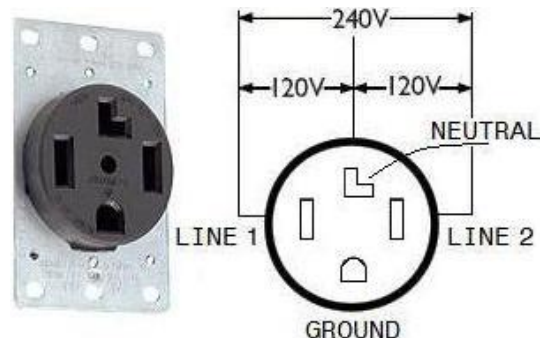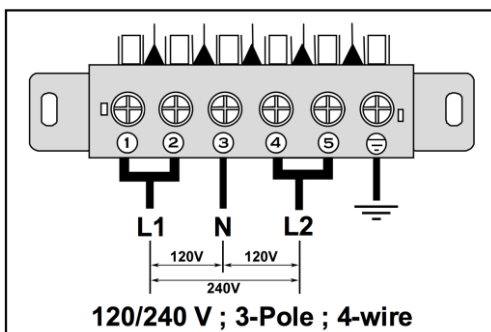



SPECIFICATIONS

CLUNY

Power Specifications for Cluny, Cluny 1400, and Cluny 1800 (no Warming Cupboard) Ranges

CLUNY	CLUNY 1400	CLUNY 1800	Voltage (V)	Amperage (A)	Wattage (W)
ULG1052G	ULG1452G	ULG1852G	120 / 240	< 0.5	< 100
ULG1052GE	ULG1452GE	ULG1852GE	120 / 240	9.3	2222
ULG1052GCT	ULG1452GCT	ULG1852GCT	120 / 240	11.2	2672
ULG1052E	ULG1452E	ULG1852E	120 / 240	18.4	4402
ULG1052ECT	ULG1452ECT	ULG1852ECT	120 / 240	20.3	4852
ULCF1052G	ULCF1452G	ULCF1852G	120 / 240	< 0.5	< 100
ULCF1052GE	ULCF1452GE	ULCF1852GE	120 / 240	9.3	2222
ULCF1052GCT	ULCF1452GCT	ULCF1852GCT	120 / 240	11.2	2672
ULCF1052E	ULCF1452E	ULCF1852E	120 / 240	18.4	4402
ULCF1052ECT	ULCF1452ECT	ULCF1852ECT	120 / 240	20.3	4852

Ranges with Plancha cooktop option, add: 9.2 Amps, 2200 Watts

Ranges with Multicooker option, add: 14.6 Amps, 3500 Watts

Ranges with Induction option, add 16.2 Amps, 3700 Watts

Power Specifications for Cluny 1400 and Cluny 1800 (+ETL001*) Ranges

CLUNY 1400 +ETL001*	CLUNY 1800 +ETL001*	Voltage (V)	Amperage (A)	Wattage (W)
ULG1452G+ETL001	ULG1852G+ETL001	120 / 240	4.2	992
ULG1452GE+ETL001	ULG1852GE+ETL001	120 / 240	13.3	3172
ULG1452GCT+ETL001	ULG1852GCT+ETL001	120 / 240	15.1	3622
ULG1452E+ETL001	ULG1852E+ETL001	120 / 240	22.3	5352
ULG1452ECT+ETL001	ULG1852ECT+ETL001	120 / 240	24.2	5802
ULCF1452G+ETL001	ULCF1852G+ETL001	120 / 240	4.2	992
ULCF1452GE+ETL001	ULCF1852GE+ETL001	120 / 240	13.3	3172
ULCF1452GCT+ETL001	ULCF1852GCT+ETL001	120 / 240	15.1	3622
ULCF1452E+ETL001	ULCF1852E+ETL001	120 / 240	22.3	5352
ULCF1452ECT+ETL001	ULCF1852ECT+ETL001	120 / 240	24.2	5802

* ETL001 = one warming cupboard

Ranges with Plancha cooktop option, add: 9.2 Amps, 2200 Watts

Ranges with Multicooker option, add: 14.6 Amps, 3500 Watts

Ranges with Induction option, add 16.2 Amps, 3700 Watts



SPECIFICATIONS

CLUNY

Power Specifications for Cluny 1800 (+2ETL001*) Ranges

CLUNY 1800+2ETL001*	Voltage (V)	Amperage (A)	Wattage (W)
ULG1852G+2ETL001	120 / 240	8.1	1942
ULG1852GE+2ETL001	120 / 240	17.2	4122
ULG1852GCT+2ETL001	120 / 240	19.1	4572
ULG1852E+2ETL001	120 / 240	26.3	6302
ULG1852ECT+2ETL001	120 / 240	28.2	6752
ULCF1852G+2ETL001	120 / 240	8.1	1942
ULCF1852GE+2ETL001	120 / 240	17.2	4122
ULCF1852GCT+2ETL001	120 / 240	19.1	4572
ULCF1852E+2ETL001	120 / 240	26.3	6302
ULCF1852ECT+2ETL001	120 / 240	28.2	6752

* 2ETL001 = two warming cupboards

Ranges with Plancha cooktop option, add: 9.2 Amps, 2200 Watts

Ranges with Multicooker option, add: 14.6 Amps, 3500 Watts

Ranges with Induction option, add 16.2 Amps, 3700 Watts