

Fourneau

«Sully»

SPECIFICATIONS

WARNING: If the information in this manual is not followed exactly, a fire or explosion may result causing property damage, personal injury or death.

- Do not store or use gasoline or other flammable vapors and liquids in the vicinity of this or any other appliance.
- **WHAT TO DO IF YOU SMELL GAS.**
 - Do not try to light any appliance.
 - Do not touch any electrical switch.
 - Do not use any phone in your building.
 - Immediately call your gas supplier from a neighbor's phone. Follow the gas supplier's instructions.
 - If you cannot reach your gas supplier, call the fire department.
- Installation and service must be performed by a qualified installer, service agency or the gas supplier.



WARNING:
THIS RANGE CAN TIP
INJURY TO PERSONS COULD RESULT
INSTALL ANTI-TIP DEVICE PACKED
WITH RANGE
SEE INSTALLATION INSTRUCTIONS









SPECIFICATIONS

SULLY





The range height is adjustable. Please refer to the RANGE HEIGHT TABLE

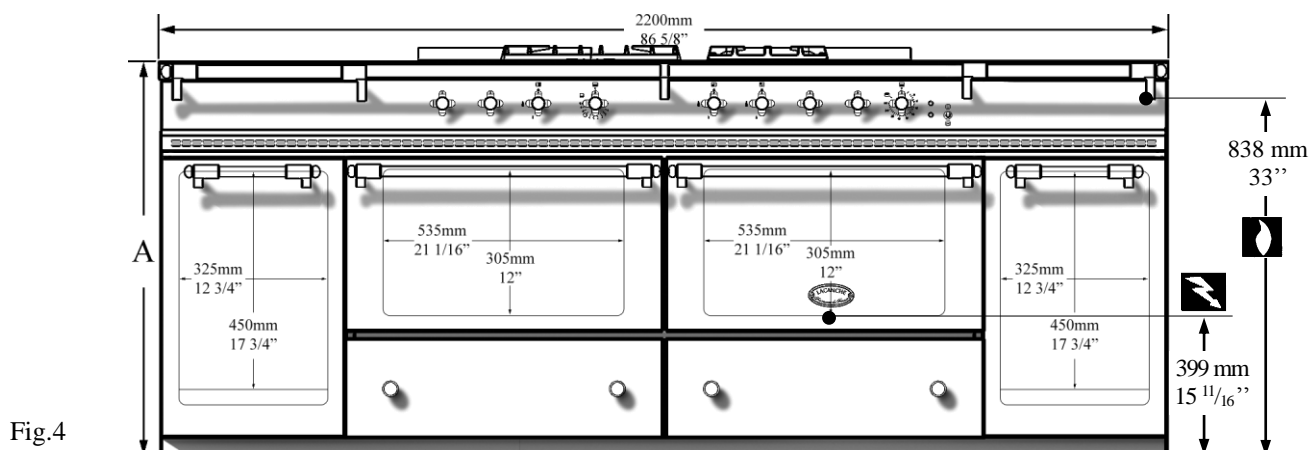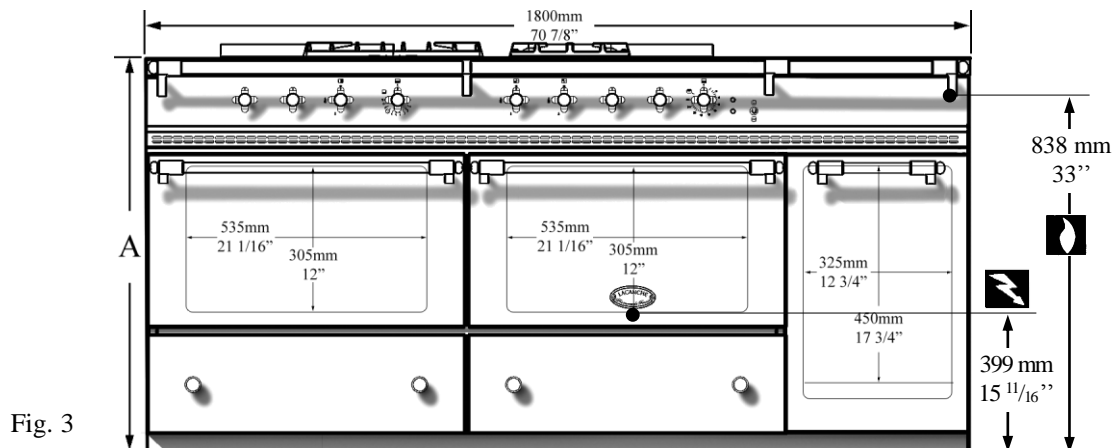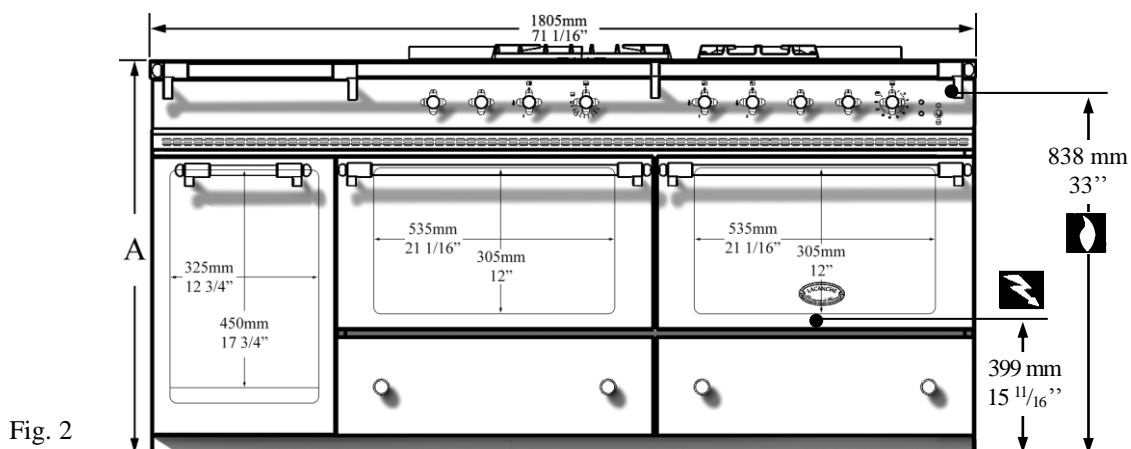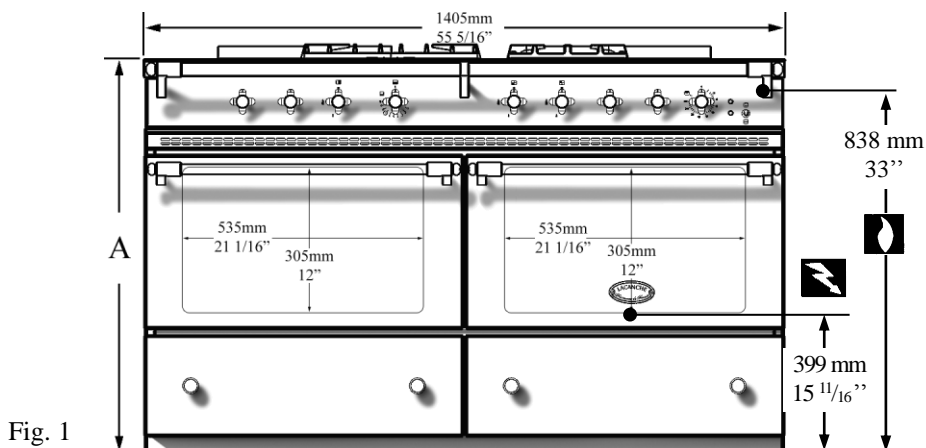



SPECIFICATIONS

SULLY

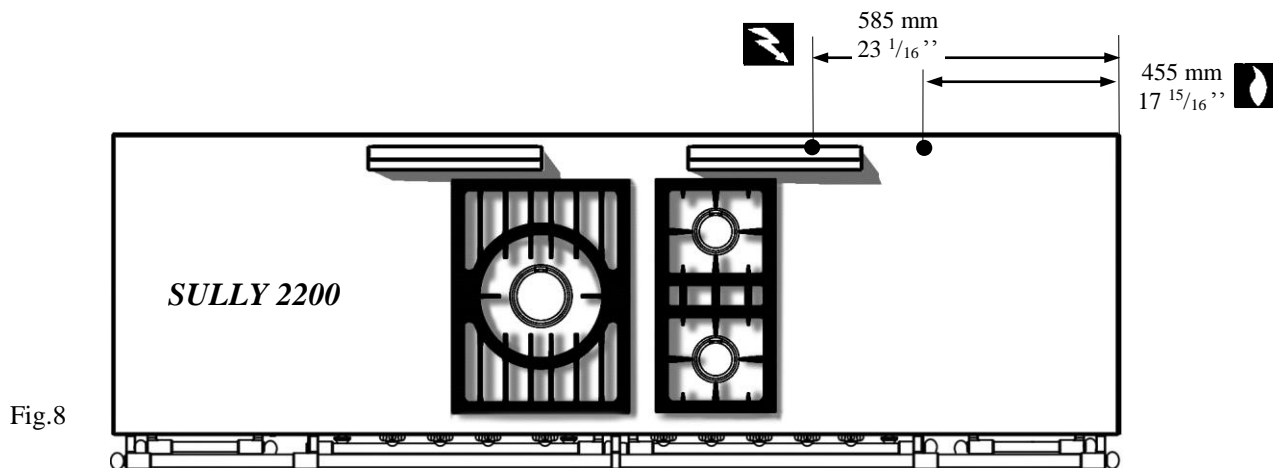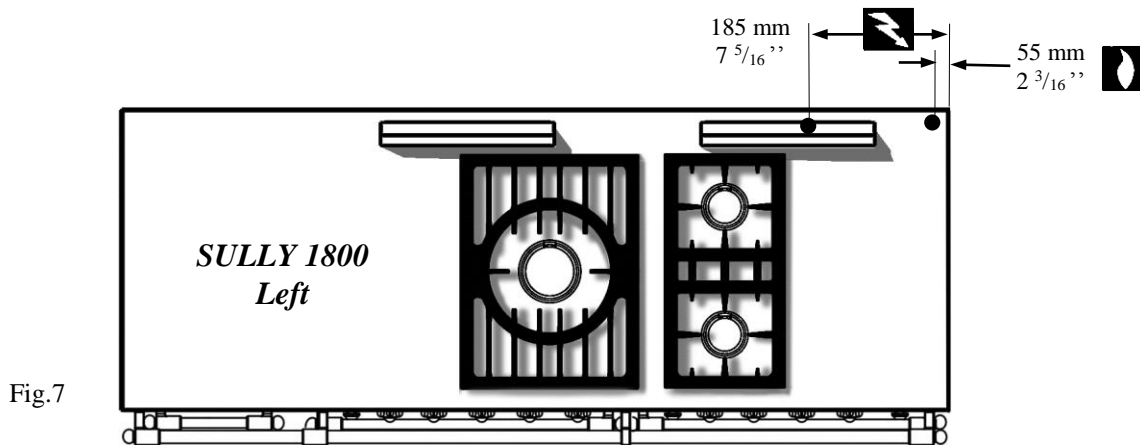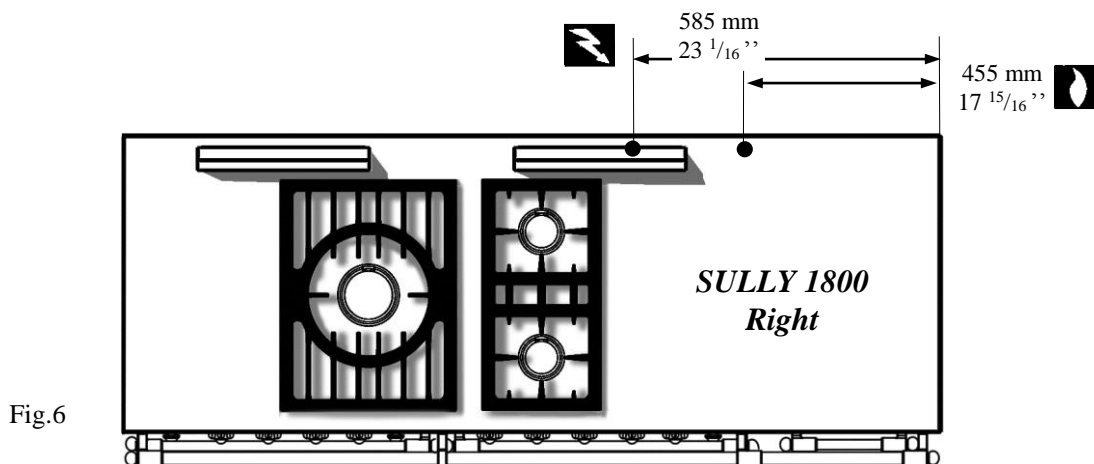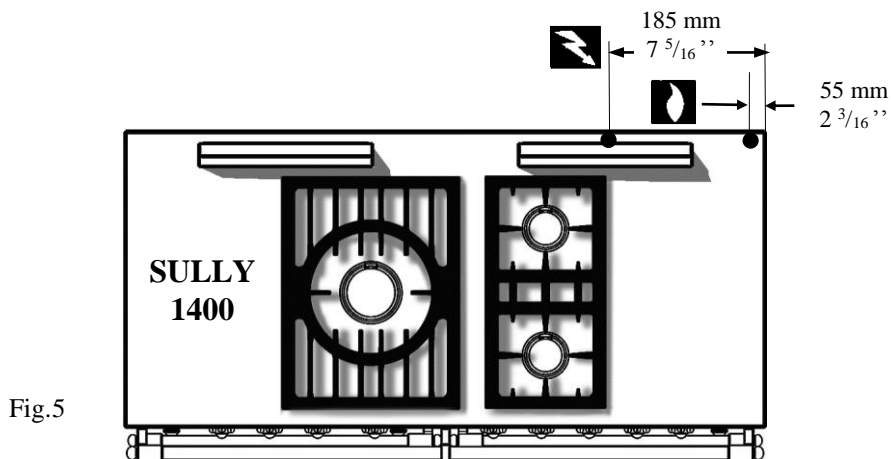



SPECIFICATIONS SULLY

The range Height is adjustable: Refer to the RANGE HEIGHT TABLE


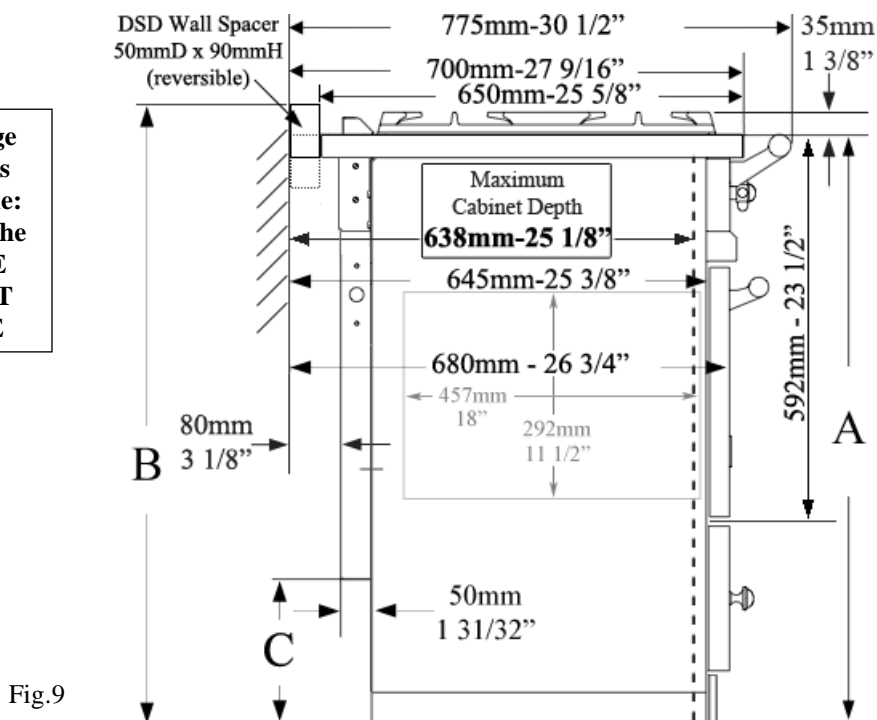


Fig.9

RANGE HEIGHT TABLE			
The default range height of 35 3/8" will adjust to the standard countertop height of 36" using the included extended leveling feet provided (to a maximum height of 36 1/2")			
Range Height:	A	B	C
Default	900mm - 35 3/8" (Max 36 1/2")	950mm - 37 3/8"	215mm - 8 7/16"
Optional	930mm - 36 5/8" (Max 37 3/4")	980mm - 38 9/16"	245mm - 9 5/8"
All final range height dimensions are variable with the use of the adjustable range feet. Maximum added height for the Roller Feet: 16mm - 5/8", Extended Leveling Feet : 30mm - 1 3/16"			

DSD 50mm Wall Spacer (reversible):



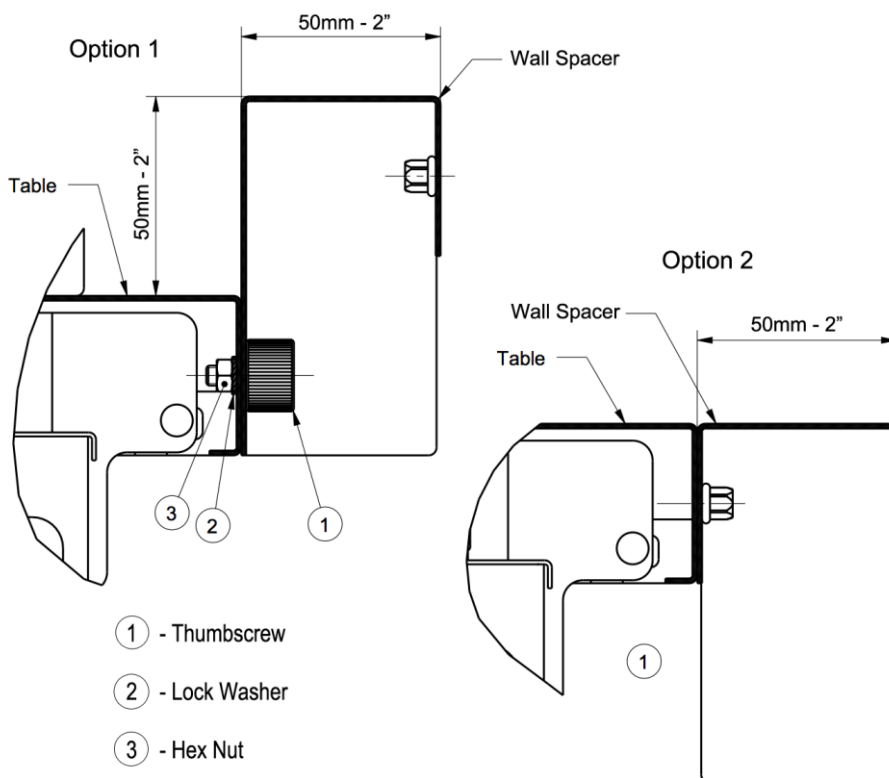

SPECIFICATIONS

SULLY

Layout (standard):

3-burner cook's stove consisting of a cooking surface above two 62 litre ovens. The work surfaces adjacent to the cooking surfaces are designed to accommodate one of the optional built-in units in the **LACANCHE** range or to be used as a worktop (Figures 1, 2, 3 & 4).

Description:

Cooking surface and body panels:

Enamelled steel or stainless body panels AISI 430.

Press-formed cooking surfaces (stainless steel AISI 304) (Figures 5, 6, 7 & 8).

Standard Hob: 3- or 4- burners of different size and power individually controlled by a safety valve (Table 1). Electronic ignition. "TRADITION" model equipped with a 385 x 510 mm (15 ⁵/₃₂" x 20 ⁵/₆₄" heating plate. Additional burners or optional built-in cooktop units can be added to the cooking surface above the two 62 litre ovens and one or two general purpose cabinets (Sully 1800 & 2200) which can optionally be equipped with heating elements.

Power supply: 120 VAC 60Hz.

Gas oven:

Enamelled sheet metal. Dimensions W x D x H: 535 mm (21 ¹/₁₆" x 465 mm (18 ¹⁹/₆₄" x 300 mm (11 ⁵¹/₆₄"). 3 shelf level with 70 mm spacing, 69 liters / 2.44 ft³. Heating provided by thermostatically controlled burner, thermocouple safety cut-outs. Electronic ignition.

Power supply: 120 VAC 60Hz.

Multifunction electric oven:

Dimensions W x D x H: 535 (21 ¹/₁₆" x 420 (16 ¹⁷/₃₂" x 265 (10 ²⁷/₆₄"); 68 litres/ 2.40 ft³, 3 shelf level with 70 mm spacing

Electric grill with a rating of 2850 W

Function static electric oven:

One 1700 W element at the base and a peripheral 1200 W element in the roof which operate simultaneously. Thermostatically controlled roof and base heating elements, safety cut-out by safety thermostat.

Rating: 2900 W – Power supply: 240 Volts 60Hz.

Function ventilated electric oven:

Heating provided by one circular 2650 W element and one peripheral of 1200 W element.. Thermostatically controlled heating elements, safety cut-out by safety thermostat.

Rating: 2650 W – Power supply: 240 Volts 60Hz.

Warming cupboard (SULLY 1800 and SULLY 2200)

Insulated stainless internal lining (AISI 304). Heating provided by 950 W heating element underneath base. Controlled by thermostat selector switch, 100°F to 230°F. Capacity: 72 plates, Ø 240 mm (9.5"). Dimensions D x W x H: 530 mm (20.8") x 325 mm (12.8") x 490 mm (19.3"). 5 shelf level with 68 mm (2.8").

Rating: 950 W – Power supply: 240 Volts 60Hz

Accessories (standard):

Gas oven: A wire rack, a drip tray, a pastry sheet.

Electric Oven: A wire rack, a drip tray, a wire broil/grill insert, a pastry sheet.

Shipment-Packaging:

Unpack and check the appliance is in good condition. In case of damage, note any reservations on the delivery note and report them within 7 days to your retailer/distributor to be claimed on shippers insurance.

Appliance	Width	Depth	Height mm	Weight Gross/Net
LG 1432 G	1450 mm / 57.1"	840 mm / 33.1"	1070 mm / 42.1"	200 kg /180 kg – 445 / 400 lb
LG 1832 G	1850 mm / 72.8"	840 mm / 33.1"	1070 mm / 42.1"	275 kg /245 kg – 605 / 540 lb
LG 2232G	2250 mm / 88.6"	840 mm / 33.1"	1070 mm / 42.1"	350 kg /310 kg – 770 / 685 lb



SPECIFICATIONS SULLY

Gas connection:

1/2" ID NPT (Sch 40) inlet, on male coupling (Figures 1, 2, 3, 4, 5, 6, 7 & 8). Sealant on all pipe joints must be resistive to LP gas.

If used, a flex gas line for the gas supply must be metal of at least 1/2" ID NPT approved by an approved certifying agency (A.G.A., C.G.A., etc.) in compliance with ANSI Z21.41 and Z21.69. Never use a hose made of rubber or other synthetic material.

Gas supplying:


Appliance gas supplying can be switched, please refer to rating plate and marking at the rear of the appliance. **If specified at the time of the order, the appliance is built to use the gas type specified. No further work is necessary.**

Pressures and hourly consumption:

>> **Gas supply input pressure must be no higher than 0.5psi.**

Appliance gas supplying can be switched (table 1).



Table 1		
PRESSURE	6" WC	10" WC
GAS	Natural Gas	L.P.
Burner	Btu / hr	Btu / hr
Oven	13500	11000
Ultra fast (UF) Tradition (T)	18000	17000
Intensive (I)	15000	13000
Fast (F)	11000	10000
Semi fast (SF)	5000	5000

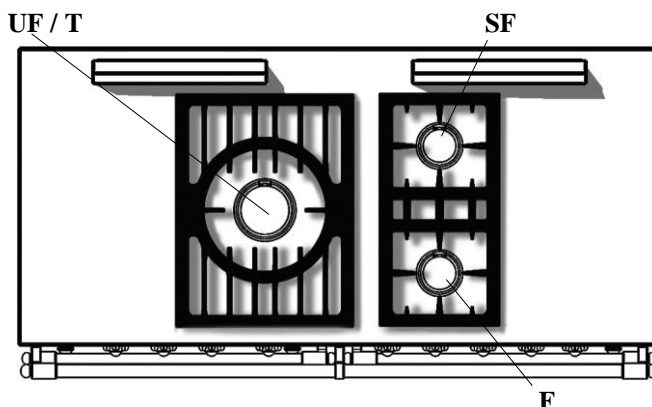


Electrical connection:

On terminal block at the rear of the appliance. Use flexible cord in accordance with standard N.E.C., AINSI/NEMA 70-1996 or latest edition (not cord provided by factory) (location on Figures 1, 2, 3, 4, 5, 6, 7 & 8).

>> **Appliance power cord is installed by importer/distributor. Do not remove installed power cord.**

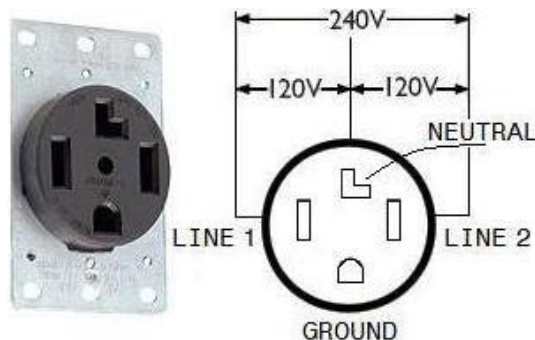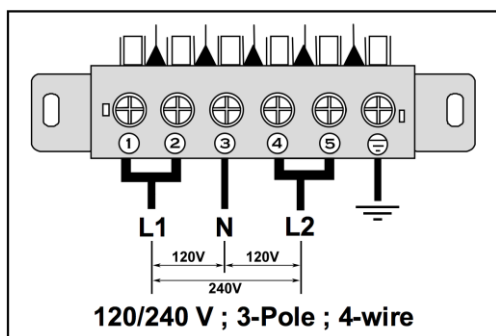

Potfiller Positions:

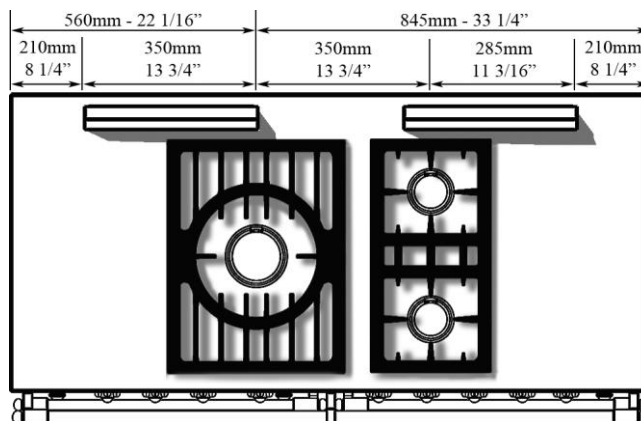



SPECIFICATIONS

SULLY

Power Specifications for Sully, Sully 1800, and Sully 2200 (no Warming Cupboard) Ranges

SULLY	SULLY 1800	SULLY 2200	Voltage (V)	Amperage (A)	Wattage (W)
ULG1432G	ULG1832G	ULG2232G	120 / 240	< 0.5	< 100
ULG1432GE	ULG1832GE	ULG2232GE	120 / 240	12.2	2922
ULG1432GCT	ULG1832GCT	ULG2232GCT	120 / 240	11.2	2672
ULG1432E	ULG1832E	ULG2232E	120 / 240	24.2	5802
ULG1432ECT	ULG1832ECT	ULG2232ECT	120 / 240	23.2	5552
ULCF1432G	ULCF1832G	ULCF2232G	120 / 240	< 0.5	< 100
ULCF1432GE	ULCF1832GE	ULCF2232GE	120 / 240	12.2	2922
ULCF1432GCT	ULCF1832GCT	ULCF2232GCT	120 / 240	11.2	2672
ULCF1432E	ULCF1832E	ULCF2232E	120 / 240	24.2	5802
ULCF1432ECT	ULCF1832ECT	ULCF2232ECT	120 / 240	23.2	5552

Ranges with Plancha cooktop option, add: 9.2 Amps, 2200 Watts

Ranges with Multicooker option, add: 14.6 Amps, 3500 Watts

Ranges with Induction option, add 16.2 Amps, 3700 Watts

Power Specifications for Sully 1800 and Sully 2200 (+ETL001*) Ranges

SULLY 1800 + ETL001*	SULLY 2200 + ETL001*	Voltage (V)	Amperage (A)	Wattage (W)
ULG1832G+ETL001	ULG2232G+ETL001	120 / 240	4.2	992
ULG1832GE+ETL001	ULG2232GE+ETL001	120 / 240	16.2	3872
ULG1832GCT+ETL001	ULG2232GCT+ETL001	120 / 240	15.1	3622
ULG1832E+ETL001	ULG2232E+ETL001	120 / 240	28.2	6752
ULG1832ECT+ETL001	ULG2232ECT+ETL001	120 / 240	27.1	6502
ULCF1832G+ETL001	ULCF2232G+ETL001	120 / 240	4.2	992
ULCF1832GE+ETL001	ULCF2232GE+ETL001	120 / 240	15.1	3622
ULCF1832GCT+ETL001	ULCF2232GCT+ETL001	120 / 240	16.2	3872
ULCF1832E+ETL001	ULCF2232E+ETL001	120 / 240	28.2	6752
ULCF1832ECT+ETL001	ULCF2232ECT+ETL001	120 / 240	27.1	6502

* ETL001 = one warming cupboard

Ranges with Plancha cooktop option, add: 9.2 Amps, 2200 Watts

Ranges with Multicooker option, add: 14.6 Amps, 3500 Watts

Ranges with Induction option, add 16.2 Amps, 3700 Watts

Power Specifications for Sully 2200 (+2ETL001*) Ranges

SULLY 2200 + 2ETL001*	Voltage (V)	Amperage (A)	Wattage (W)
ULG2232G+2ETL001	120 / 240	8.1	1942
ULG2232GE+2ETL001	120 / 240	20.1	4822
ULG2232GCT+2ETL001	120 / 240	19.1	4572
ULG2232E+2ETL001	120 / 240	32.1	7702
ULG2232ECT+2ETL001	120 / 240	31.1	7452
ULCF2232G+2ETL001	120 / 240	8.1	1942
ULCF2232GE+2ETL001	120 / 240	20.1	4822
ULCF2232GCT+2ETL001	120 / 240	19.1	4572
ULCF2232E+2ETL001	120 / 240	32.1	7702
ULCF2232ECT+2ETL001	120 / 240	31.1	7452

* 2ETL001 = two warming cupboards

Ranges with Plancha cooktop option, add: 9.2 Amps, 2200 Watts

Ranges with Multicooker option, add: 14.6 Amps, 3500 Watts

Ranges with Induction option, add 16.2 Amps, 3700 Watts